

Rev 1.1
19.09.2014

Active biconical Antennas - BicoLOG X Series

Active Antennas with high gain up to 41dBi

Highlights

- ◆ Only a single broadband test antenna for the complete frequency range from 20MHz up to 3GHz
- ◆ Optimal for usage with spectrum analysers for EMC measurement
- ◆ Suitable for mobile use
- ◆ Small weight and dimensions
- ◆ Made in Germany
- ◆ 10 years warranty



Made in Germany




Specifications

BicoLOG® 5070 X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **50MHz to 700MHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: 11dBi to 41dBi
- ◆ Calibration points: **70** (5MHz and 10MHz steps)
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (350x160x140)mm
- ◆ Weight: 500gr
- ◆ **Warranty: 10 years**


Gain Diagram BicoLOG 5070 X

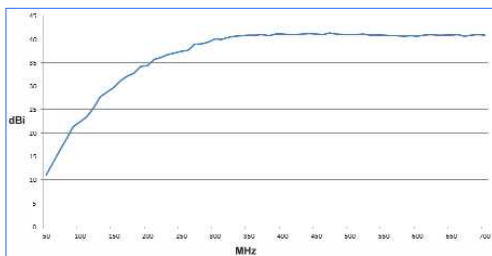

BicoLOG® 30100 X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **30MHz to 1GHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: 1dBi to 41dBi
- ◆ Calibration points: **104** (5MHz and 10MHz steps)
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (350x160x140)mm
- ◆ Weight: 500gr
- ◆ **Warranty: 10 years**


Gain Diagram BicoLOG 30100 X

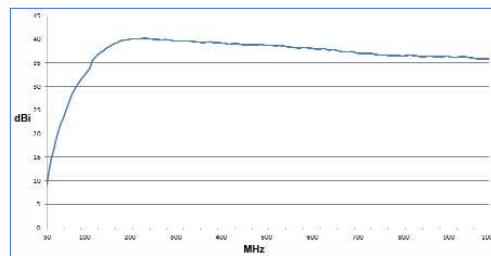

BicoLOG® 30100E X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **30MHz to 1GHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: 9dBi to 41dBi
- ◆ Calibration points: **194 (5MHz steps)**
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1300gr
- ◆ **Warranty: 10 years**


Gain Diagram BicoLOG 30100E X

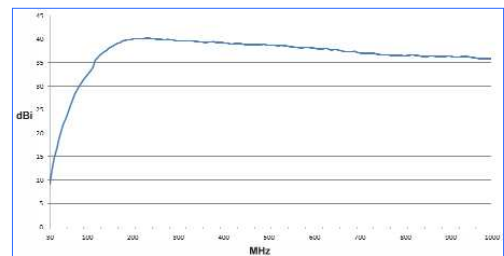

BicoLOG® 20100 X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **20MHz to 1GHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: -5dBi to 41dBi
- ◆ Calibration points: **106** (5MHz and 10MHz steps)
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (350x160x140)mm
- ◆ Weight: 500gr
- ◆ **Warranty: 10 years**


Gain Diagram BicoLOG 20100 X

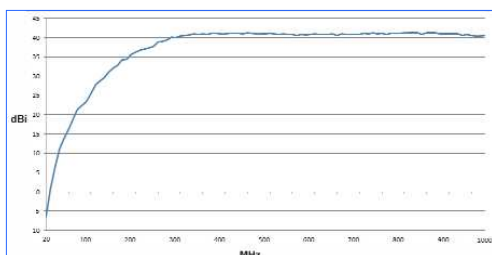

BicoLOG® 20100E X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **20MHz to 1GHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: 2dBi to 41dBi
- ◆ Calibration points: **196 (5MHz steps)**
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1300gr
- ◆ **Warranty: 10 years**


Gain Diagram BicoLOG 20100E X

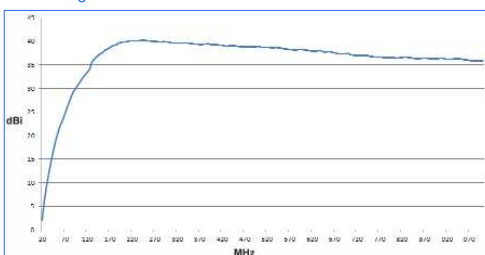

BicoLOG® 20300 X

- ◆ Design: Biconical (active)
- ◆ Frequency range: **20MHz to 3GHz**
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: -5dBi to 41dBi
- ◆ Calibration points: **296** (5MHz and 10MHz steps)
- ◆ RF connection: SMA (female) or N with adapter
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (350x160x140)mm
- ◆ Weight: 500gr
- ◆ **Warranty: 10 years**

Gain Diagram BicoLOG 20300 X

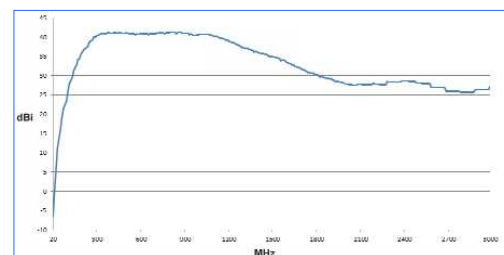

Recommended accessories for Aaronia Antennas

Heavy multifunctional Pistol Grip (strongly recommended!)

Highly recommend for the usage of our BicoLOG active antennas. Quick and easy change of antenna polarization, perfect antenna handling (even with the more heavy BicoLOG 30100E X and 20100E X).

Order/Art.-No.: 282



1m / 5m / 10m SMA-Cable

High quality special SMA cable for connecting any BicoLOG®-Antenna with various test equipment like SPECTRAN RF Spectrum-Analyzer. You can choose between 3 different cables:

- 1m standard SMA cable (RG316U)
- 5m LowLoss SMA cable (especially low damping)
- 10m LowLoss SMA cable (especially low damping)

All versions: SMA plug (male) / SMA plug (male)

Order/Art.-No.: 771 (1m Cable), 772 (5m Cable), 773 (10m Cable)



SMA to N Adapter

This special high quality adapter allows operation of all BicoLOG®-Antenna with any standard spectrum-analyzer with N connector.

Especially massive, chrome-plated design. This adapter is usable for very high frequencies up to at least 18GHz. Physical dimensions are just 30x20mm. Nominal impedance 50 Ohms. Layout: SMA socket (female) / N plug (male).

Order/Art.-No.: 770



Pistol grip / miniature tripod


Detachable handle with super-practical miniature tripod mode: this handle is attachable to the backside of the unit and allows optimal handling and even fixed installation of the unit. Strongly recommended for PC use!

Order/Art.-No.: 280




Frequency overview Analyzer & Antennas

Frequency Overview SPECTRAN Spectrum Analyzer

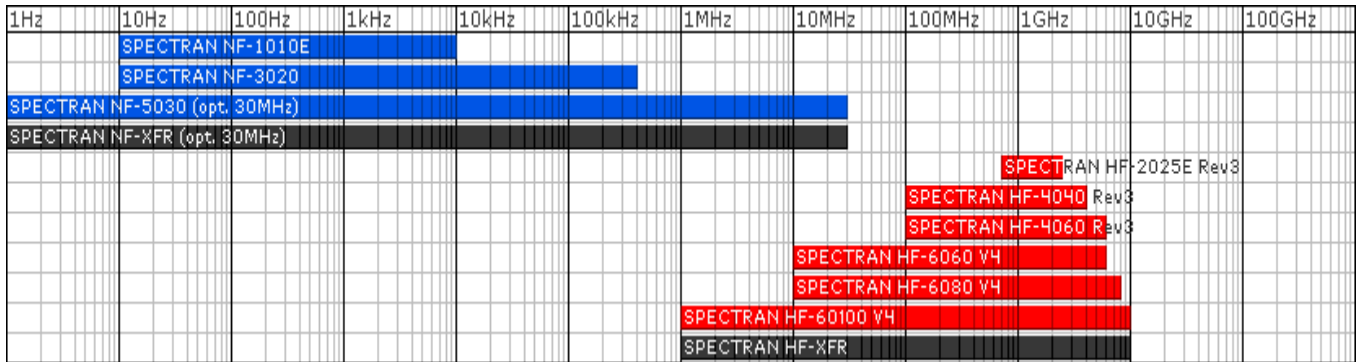

Frequency Overview HyperLOG and BicoLOG Antennas and Probes

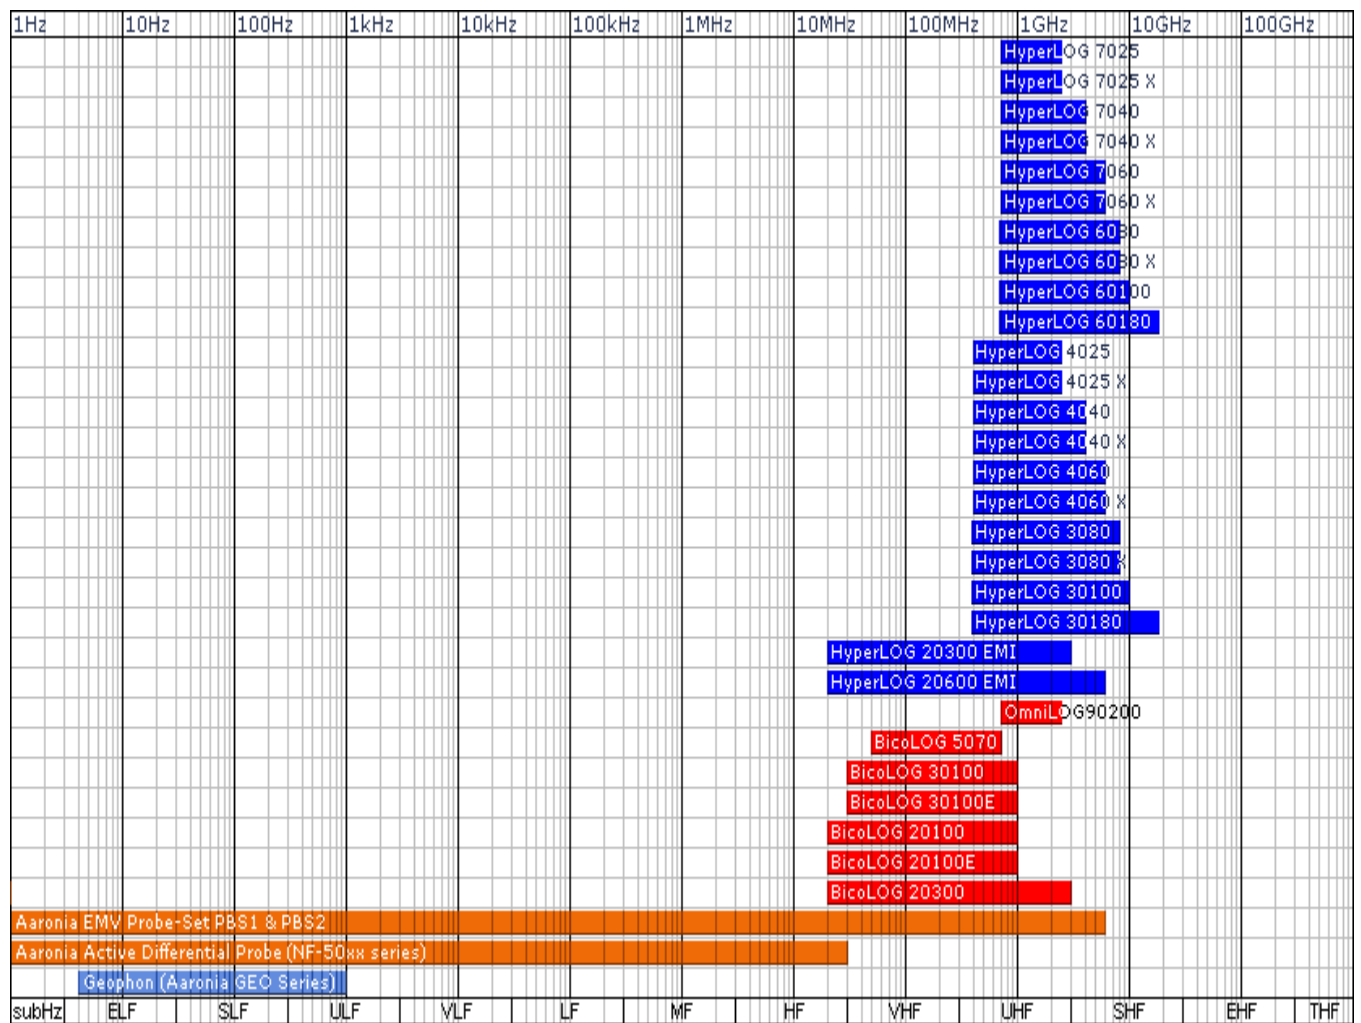

References

User of Aeronia Antennas and Spectrum Analyzers (Examples)

Government, Military, Aeronautic, Astronautic

- ◆ NATO, Belgium
- ◆ Boeing, USA
- ◆ Airbus, Germany
- ◆ Bund (Bundeswehr), Germany
- ◆ Bundeswehr (Technische Aufklärung), Germany
- ◆ Lufthansa, Germany
- ◆ DLR (Deutsches Zentrum für Luft- und Raumfahrt, Germany)
- ◆ Eurocontrol (Flugüberwachung), Belgium
- ◆ Australian Government Department of Defence, Australia
- ◆ EADS (European Aeronautic Defence & Space Company) GmbH, Germany
- ◆ Institut für Luft- und Raumfahrtmedizin, Germany
- ◆ Deutscher Wetterdienst, Germany
- ◆ Polizeipräsidium, Germany
- ◆ Landesamt für Umweltschutz Sachsen-Anhalt, Germany
- ◆ Zentrale Polizeitechnische Dienste, Germany
- ◆ Bundesamt für Verfassungsschutz, Germany
- ◆ BEV (Bundesamt für Eich- und Vermessungswesen)

Research/Development, Science and Universitys

- ◆ Deutsches Forschungszentrum für Künstliche Intelligenz, Germany
- ◆ University Freiburg, Germany
- ◆ Indonesien Institute of Sience, Indonesia
- ◆ Max-Planck-Institut für Polymerforschung, Germany
- ◆ Los Alamos National Labratory, USA
- ◆ University of Bahrain, Bahrain
- ◆ University of Florida, USA
- ◆ University Erlangen, Germany
- ◆ University Hannover, Germany
- ◆ University of Newcastle, United Kingdom
- ◆ University Strasbourg, France
- ◆ Universität Frankfurt, Germany
- ◆ University Munich, Germany
- ◆ Technical University Hamburg, Germany
- ◆ Max-Planck Institut für Radioastronomie, Germany
- ◆ Max-Planck-Institut für Quantenoptik, Germany
- ◆ Max-Planck-Institut für Kernphysik, Germany
- ◆ Max-Planck-Institut für Eisenforschung, Germany
- ◆ Forschungszentrum Karlsruhe, Germany

Industry

- ◆ Shell Oil Company, USA
- ◆ ATI, USA
- ◆ Fedex, USA
- ◆ Walt Disney, Kalifornien, USA
- ◆ Agilent Technologies Co. Ltd., China
- ◆ Motorola, Brazil
- ◆ IBM, Switzerland
- ◆ Audi AG, Germany
- ◆ BMW, Germany
- ◆ Daimler Chrysler AG, Germany
- ◆ BASF, Germany
- ◆ Deutsche Bahn, Germany
- ◆ Deutsche Telekom, Germany
- ◆ Siemens AG, Germany
- ◆ Rohde & Schwarz, Germany
- ◆ Infineon, Austria
- ◆ Philips Technologie GmbH, Germany
- ◆ ThyssenKrupp, Germany
- ◆ EnBW, Germany
- ◆ RTL Television, Germany
- ◆ Pro Sieben – SAT 1, Germany
- ◆ Channel 6, United Kingdom
- ◆ WDR, Germany
- ◆ NDR, Germany
- ◆ SWR, Germany
- ◆ Bayerischer Rundfunk, Germany
- ◆ Carl-Zeiss-Jena GmbH, Germany
- ◆ Anritsu GmbH, Germany
- ◆ Hewlett Packard, Germany
- ◆ Robert Bosch GmbH, Germany
- ◆ Mercedes Benz, Austria
- ◆ EnBW Kernkraftwerk GmbH, Germany
- ◆ AMD, Germany
- ◆ Infineon Technologies, Germany
- ◆ Intel GmbH, Germany
- ◆ Philips Semiconductors, Germany
- ◆ Hyundai Europe, Germany
- ◆ Saarschmiede GmbH, Germany
- ◆ Wilkinson Sword, Germany
- ◆ IBM Deutschland, Germany
- ◆ Vattenfall, Germany
- ◆ Fraport, Germany

Aaronia Distributors



Aaronia USA, 651 Amberton Crossing
Suwanee, Georgia 30024 USA
Phone ++1 678-714-2000, Fax ++1 678-714-2092
Email: sales@aaroniausa.com
URL: www.aaroniaUSA.com



Aaronia North China, Beijing Mesh Communication
Tech Co. Ltd., No. 2 Huayuan Road, Building 2, Haidian
District, 100191 Beijing, China
Phone ++86 10 822 37 606, Fax ++86 10 822 37 609
Email: sales@bjmesh.com
URL: www.bjmesh.com.cn



Aaronia South China, Shenzhen TORI Wisdom
Technology Co., Ltd, 3BRM, RD FL Luhua Technology
Bldg, Guangxia Road 7, Futian, 518049 Shenzhen, China
Phone ++86 755 888 580 86, Fax +86 755 830 73 418
Email: mail@aaronia-china.com
URL: www.aaronia-china.com



E-Instrument Tech Ltd., No. 16, Lane 37
Guanye E. Riad, Pingchen City,
324587 Taoyuan County, Taiwan
Phone: +886 3 4576 809 Fax: +886 3 468 8611
Email: sales@e-channel.com.tw
URL: www.e-channel.com.tw




Testpribor, Fabriciusa St. 30
Moscow 125363 Russia
Phone ++7 495-225-67-37
Email: testpribor@test-expert.ru
URL: www.test-expert.ru



EgeRate Elektronik Muh. ve Tic. Ltd. Sti.,
Perpa Ticaret Merkezi, A Blok Kat: 5 No: 141,
Sisli / Istanbul, Turkey
Phone ++90 212 220 3483, Fax ++90 212 220 7635
Email: info@egerate.com
URL: www.egerate-store.com



Aimil Ltd, B-906, BSEL Tech Park, Opp. Vashi Rly Stn,
400705 Vashi, Navi Mumbai, India
Phone ++91 22 3918 3554, Fax ++91 22 3918 3562
Email: sanjayagarwal@aimil.com
URL: www.aimil.com



EKKON SA, Paraná 350, Capital Federal,
1017 Buenos Aires, Argentina
Phone ++ 54 114 123 009 1, Fax ++54 114 372 324 4
Email: info@aaronia-argentina.com.ar
URL: www.aaronia-argentina.com.ar



Mono Tech Ltd, 2 Johanan Hasandlar St.
44641 Kfar-Sava, Israel
Phone ++972 72 2500 290, Fax ++972 9 7654 264
Email: kobi@aaronia.co.il
URL: www.aaronia.co.il



Tagor Electronic doo
Tihomira Brankovica 21
18000 Nis, Serbia
Phone ++381 18 575 545, Fax ++381 18 217 125
Email: miodrag.stojilkovic@tagor.rs
URL: www.tagor-instrumenti.rs



NDN, Janowskiego 15
02-784 Warszawa, Poland
Phone ++48 22 641 1547, Fax ++48 22 641 1547
Email: ndn@ndn.com.pl
URL: www.ndn.com.pl



VECTOR Technologies Ltd, 40 Diogenous str., 15234
Halandri, Greece
Phone ++30 210 685 8008, Fax ++30 210 6858 8118
Email: info@vectortechnologies.gr
URL: www.vectortechnologies.gr



Made in Germany

Aaronia AG, Gewerbegebiet Aaronia AG, DE-54597 Strickscheid, Germany
Phone ++49(0)6556-93033, Fax ++49(0)6556-93034
Email: mail@aaronia.de URL: www.aaronia.com

Spectran® **HyperLOG®** **BicoLOG®** **OmniLOG®** **Aaronia-Shield®** **Aaronia X-Dream®** **MagnoShield®** **IsoLOG®**

are registered trademarks of Aaronia AG